



SOHO



DATACENTRE



E-MEDICAL



INDUSTRY



TRANSPORT



EMERGENCY

# Sentinel Tower



ONLINE



Tower



**1:1** 5-6 kW

**1:1** **3:1** 8-10 kW



Supercaps  
UPS



USB  
plug



Energy  
share



Service  
1st start



## HIGHLIGHTS

- **Small footprint**
- **Power factor 1**
- **High efficiency 95%**
- **Parallelable up to 3 units**
- **3 level inverter**
- **High quality output voltage**

Sentinel Tower is the ideal solution for protecting mission critical systems such as safety devices, telecommunications equipment but also IT systems to ensure maximum power reliability. Sentinel Tower is designed and built using state-of-the-art technology and components to provide maximum protection to the powered loads with no impact on downstream systems and optimised energy savings.

The series includes 5-6 kVA single/single-phase and 8-10 kVA single/three-phase input single-phase output models with on-line double conversion technology (VFI): the load is powered continuously by the inverter which supplies a sinusoidal voltage,

filtered and stabilised in terms of form and frequency. Input and output filters provide significant further immunity from mains disturbances and lightning strikes.

In terms of technology and performance, Sentinel Tower is one of the best UPS available on the market today: three level inverter to achieve 95% efficiency, output power factor 1 to increase in efficiency of system and devices and reduce power system losses.

Selectable Economy Mode and Smart Active Mode functions; new custom diagnostics LCD display, RS232 and USB interfaces with Powershield3 software, ESD input, interface slot with optional boards.

## High UPS reliability

- Total microprocessor and DSP control.
- Interruption-free static and manual bypass.
- Specifications guaranteed up to 40°C (the components are designed to work at high temperatures and thus are subject to less stress at normal temperatures).

## Parallelable

Parallel configuration of 3 units for (2+1) redundant or power parallel system. The UPS continue to operate in parallel even if the connection cable is interrupted (Closed Loop).

## Unity Power Factor

- More power delivered
- More real output power (W)

## Operating mode selection

The operating mode can be programmed via software or manually via the front display panel.

- **On line:** efficiency up to 95%.
- **Economy Mode:** to increase efficiency (up to 98%), allows for the selection of Line Interactive technology (VI) to power low priority loads from the mains supply.
- **Smart Active:** the UPS automatically decides upon the operating mode (VI or VFI) based on the quality of the mains power supply.
- **Emergency:** the UPS can be selected to function only when the mains power supply fails (emergency only mode).
- **Frequency converter** operation (50 or 60 Hz).

## High quality output voltage

- Even with non-linear loads (IT loads with a crest factor of up to 3:1).
- High short circuit current on bypass.
- High overload capacity: 150% by inverter (even with mains failure).
- Filtered, stabilised and reliable voltage (double conversion on-line technology - VFI compliant with EN62040-3), with filters for the suppression of atmospheric disturbances.
- Power factor correction: UPS input power factor close to 1 and sinusoidal current uptake.

## Simplified installation

- UPS can be installed on a single-phase or three-phase distribution network STW 8000 and STW 10000.
- Output terminal board + 2 IEC sockets for powering local consumers (computers, devices, etc.).
- Simplified positioning (built-in castors).



## High battery reliability

- Automatic and manual battery test.
- Proper battery care is critical to ensuring correct UPS operation in emergency conditions. The Riello UPS battery care system consists of a series of features and capabilities to optimise battery management and obtain the best performance and operating life possible.
- Unlimited extendible runtime using matching Battery Boxes.
- The batteries do not cut in during mains failures of <20 ms (high hold up time) or when the input supply is between 184 V to 276 V.

## Low impact on the mains

Sinusoidal uptake of input current on single-phase/single-phase series.

## Runtime expandability

Optional battery extension packs can be connected to increase UPS runtime. In addition the Sentinel Tower range includes ER versions with no internal batteries and more powerful controlled battery chargers 6A for longer runtimes.

## Other features

- Advanced diagnostics: status, measurements and alarms available on new custom LCD display.
- Low noise (<45 dBA): can be installed in any environment thanks to its high frequency switching inverter and PWM load-dependent digitally controlled fan (>20 kHz, value above audible range).
- Auto restart (automatic when mains supply




- is restored, programmable via software.
- Emergency function: the UPS can be selected to function only when the mains power supply fails (emergency lights).
- Back-feed protection standard: to prevent energy from being fed back to the network.
- UPS digital updating (flash upgradeable).

### Advanced communications

- Compatible with Riello Connect remote monitoring.
- Advanced multi-platform communications for all operating systems and network environments: PowerShield<sup>3</sup> monitoring and shutdown software for Windows operating systems 10, 8, 7, Hyper-V, 2012, 2008, and previous versions, Mac OS X, Linux, VMWare ESXi, Citrix XenServer and other Unix operating systems.
- RS232 serial and USB ports.
- Plug and play function.
- Slot for installation of communications boards.

## DETAILS

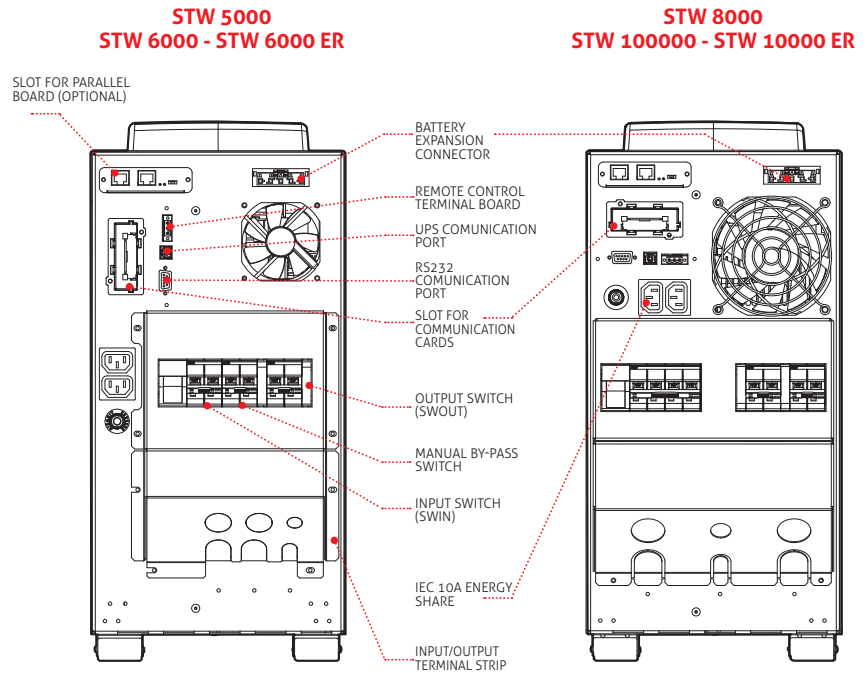

## OPTIONS

### SOFTWARE

PowerShield<sup>3</sup>  
PowerNetGuard

### ACCESSORIES

NETMAN 204  
MULTICOM 302  
MULTICOM 352  
MULTICOM 372  
MULTICOM 384  
MULTICOM 411  
MULTI I/O  
MULTIPANEL  
Manual Bypass MBB 100 A

### PRODUCT ACCESSORIES

Isolation transformer module (hlp)  
mm/kg: 500 x 400 x 265 / 80  
(only for 5000-6000 VA models)



## BATTERY BOX

### MODELS

BB STW 180V A3, BB STW 180V M1  
BB STW 240V A3, BB STW 240V M1

BB 1320 180V B1  
BB 1320 240V B1

Dimensions  
(mm)



MODELS	STW 5000	STW 6000	STW 6000 ER	STW 8000	STW 10000	STW 10000 ER
<b>INPUT</b>						
Nominal voltage	220-230-240 Vac			380 - 400 - 415 Vac (3W+N+PE) 220 - 230 - 240 Vac (1W+N+PE)		
Voltage tolerance	230 Vac $\pm$ 20%			400 Vac $\pm$ 20% / 230 Vac $\pm$ 20%		
Minimum voltage	184 Vac			318 Vac / 184 Vac		
Maximum operating voltage	276 Vac			478 Vac / 276 Vac		
Nominal frequency	50/60 Hz $\pm$ 5Hz					
Power factor	> 0.98					
Current distortion	$\leq$ 5%*					
<b>BYPASS</b>						
Voltage tolerance	180 - 264 Vac (selectable in Eco Mode or Smart Active Mode)					
Frequency tolerance	Selected frequency $\pm$ 5% (selectable by user)					
Overload Times	< 110% continuous, 130% for 1 hour, 150% for 10 minutes, over 150% for 3 seconds					
<b>OUTPUT</b>						
Nominal power (VA)	5000	6000	6000	8000	10000	10000
Active power (W)	5000	6000	6000	8000	10000	10000
Nominal voltage	220-230-240 Vac selectable					
Voltage distortion	< 3% with linear load / < 6% with non-linear load					
Frequency	50/60 Hz selectable					
Static variation	1.5%					
Dynamic variation	$\leq$ 5% in 20 ms					
Waveform	Sinusoidal					
Crest factor	3 : 1					
<b>BATTERIES</b>						
Type	VRLA AGM maintenance-free lead based					
Recharge time	4-6 hours					
<b>OTHER FEATURES</b>						
Net weight (kg)	62	63	25	78	84	28
Gross weight (kg)	68	69	31	84	90	34
Dimensions (WxDxH) (mm)	250 x 698 x 500					
Packaged dimensions (WxDxH) (mm)	300 x 800 x 702					
Efficiency	up to 95% on line mode, 98% eco mode					
Protections	Overcurrent - short-circuit - overvoltage - undervoltage - temperature - excessive low battery					
Parallel Operation	Optional Parallel Card					
Communications	USB / RS232 / slot for communications interface / REPO + Input contact					
Input Connection	Terminal block					
Output sockets	Terminal block + 2 IEC 320 C13					
Standards	EN 62040-1 EMC EN 62040-2 Directives 2014/35/EU - 2014/30/EU EN 62040-3					
Operating temperature	0 °C / +40 °C					
Relative humidity	< 95% non-condensing					
Colour	Black RAL 9005					
Noise level at 1 m (ECO Mode)	< 48 dBA					
Standard equipment provided	USB cable					
Moving the UPS	castors					

\* for single phase input



**RPS SpA - Riello Power Solutions - Member of the Riello Elettronica Group**  
 Viale Europa, 7 - 37045 Legnago (Verona) - ITALY | www.riello-ups.com  
 Tel: +39 0442 635811 - Fax: +39 0442 629098 | riello@riello-ups.com